



ALDCBS1X8

Amplified 1x8 GPS Splitter

Technical Product Data



Features

- **Excellent Gain Flatness**
 $|J1-J8| < 1.0\text{dB}$
- **Extremely Flat Group Delay**
Less than 1ns variation
- **Amplifier Gain 14dB typical**
- **Passes all GNSS Frequencies (Entire L-band)**
- **DC Blocked Outputs Feature 200 Ω Loads**
Prevent antenna alarm faults from connected devices
- **Phase Matched Outputs**
Phase (J1-J8) $< 1.0^\circ$
- **Special Configurations Available By Request**

Description

The ALDCBS1X8 GPS Amplified Splitter is a one input, eight output device based on the Wilkinson splitter design. The frequency response covers the entire L-band (all GNSS frequencies) with excellent gain flatness. In the standard configuration without external power, Output 1 (J1) passes DC from the connected GPS device through the splitter to the input (antenna port), allowing the GPS receiver to power both an active antenna and the splitter's internal amplifier. The other RF outputs (J2-J8) are DC blocked and loaded with 200 Ω resistors to simulate the antenna current draw to prevent false antenna alarm faults. Please contact GPS Networking Technical Support for any questions regarding standard configurations or special configurations at salestech@gpsnetworking.com or 1-800-463-3063.

Electrical Specifications, T_A = 25⁰C

Parameter	Conditions	Min	Typ	Max	Units
Freq. Range	Ant – Any Output, Unused Outputs - 50Ω	1.1		1.7	GHz
In/Out Imped. ⁽¹⁾	Ant, J1, J2, J3, J4, J5, J6, J7, J8		50		Ω
Gain (L1)	Any Output, Unused Outputs - 50Ω	13.0	14.0	15.0	dB
Input SWR	All ports - 50Ω			2.0:1	-
Output SWR	All ports - 50Ω			1.5:1	-
Noise Figure	Ant – Any Output, Unused Outputs - 50Ω		3.8	4.3	dB
Gain Flatness	L1 – L2 ; Ant – Any Output, Unused Outputs - 50Ω		0.5	1.5	dB
Amplitude Balance	J1 – J2 ; Ant – Any Output, Unused Outputs - 50Ω			0.5	dB
Phase Balance	Phase (J1 – J2) ; Ant – Any Output, Unused Outputs - 50Ω			1.0	deg
Isolation	Adjacent Ports, Ant - 50Ω (see plots)	15	20	25	dB
Group delay Flatness	τ _{d,max} - τ _{d,min} : Ant – J1, J2 - 50Ω ; Ant – J2, J1 - 50Ω			1	ns
Req. DC Input V.	Non-Network Configuration, DC Input on J1	3.6		15	Vdc
P _i dB	Output Power 1dB Gain Compression (f=1.5GHz)		-18		dBm
Current Draw	Amplifier Current Draw, All ports - 50Ω (typical at 5V)			15	mA

Available Options

Network Power Supply		
Source Voltage Options	VOLTAGE INPUT	STYLE
	110VAC	Transformer (Wall Mount)
	220 VAC	Transformer (Wall Mount)
	240 VAC (United Kingdom)	Transformer (Wall Mount)
Output Voltage Options ⁽¹⁾	Input DC Voltage 9-32 VDC	Mil DC Connector (includes mate)
	DC VOLTAGE OUT	MAX CURRENT OUT FOR CORRESPONDING V _{out} ⁽¹⁾
	3.3 V	110mA
	5V	130mA
	9V	140mA
	12V	170mA
	15V	210mA
Custom	TDB	
Standard DC Configuration without External Power Option		
J1/Output 1 Pass DC, J2-J8/Output 2-8 Block DC, Input Pass DC		
Standard DC Configuration with any External Power Option (AC/DC or Military DC)		
All Outputs DC Blocked with 200Ω Load Standard		
DC Blocked	Any or all ports can be custom selected to Pass or Block DC	
RF Connector Options		
Connector Options	CONNECTOR STYLE	CHARGE
	Type N-female	NC
	Type SMA-female	NC
	Type TNC-female	NC
	Type BNC-female	NC
Other	Contact GPS Networking	

(1). T_A = +50⁰C. Assuming Source of 110V or 220V Wall Mount Transformer. In general, maximum output current can be determined by:

$$I_{out} \leq 2.9 / (V_{sourceDC} - V_{out}) \text{ A}$$

Network Option (External Power Supply)
Requires 'N', Output Voltage and Power Type

HS E W N ALDCB S1X8- N / 5 / 110

Hermetically Sealed:

HS = Hermetically Sealed; **Blank**

EMI Shielding (Includes Weatherproofed):

E = EMI Shielding; **Blank**

Weatherproofed:

W = Weatherproofed; **Blank** = Std

Network Option:

N = External Power; **Blank** = No External Power

Amplified Loaded DC Blocked Outputs

ALDCB = 200Ω Loaded DC Blocked Outputs

Splitter Type:

S1X8 = GPS Splitter 8 Outputs

Connector Options (Type Female Standard):

N = N type; **S** = SMA; **T** = TNC; **B** = BNC

DC Output Voltage (**only with Network Option**):

3.3, 5, 9, 12, 15, XX (Custom: "XX")

Source Voltage (**only with Network Option**):

110=110VAC, **220**=220VAC (2 prong Euro), **240**=240VAC (3 prong UK),
MC – Military DC Connector (User supplies DC voltage range 9-32VDC)

(Military DC Mating Connector is included standard with the MC power option)


When no external power supply option (AC or DC) is selected, Output 1/J1 is Pass DC standard.
Whenever an external power supply option is selected, all outputs are DC blocked standard.

(Contact GPS Networking Technical Support at 719-595-9880 or salestech@gpsnetworking.com for any questions regarding non-standard configurations and corresponding part numbers)

Performance:


ALDCBS1X8 (Standard Gain)

Input SWR (Ant. Port) and Frequency Response: Ant. To J1-J8) (Typical, type N connectors):

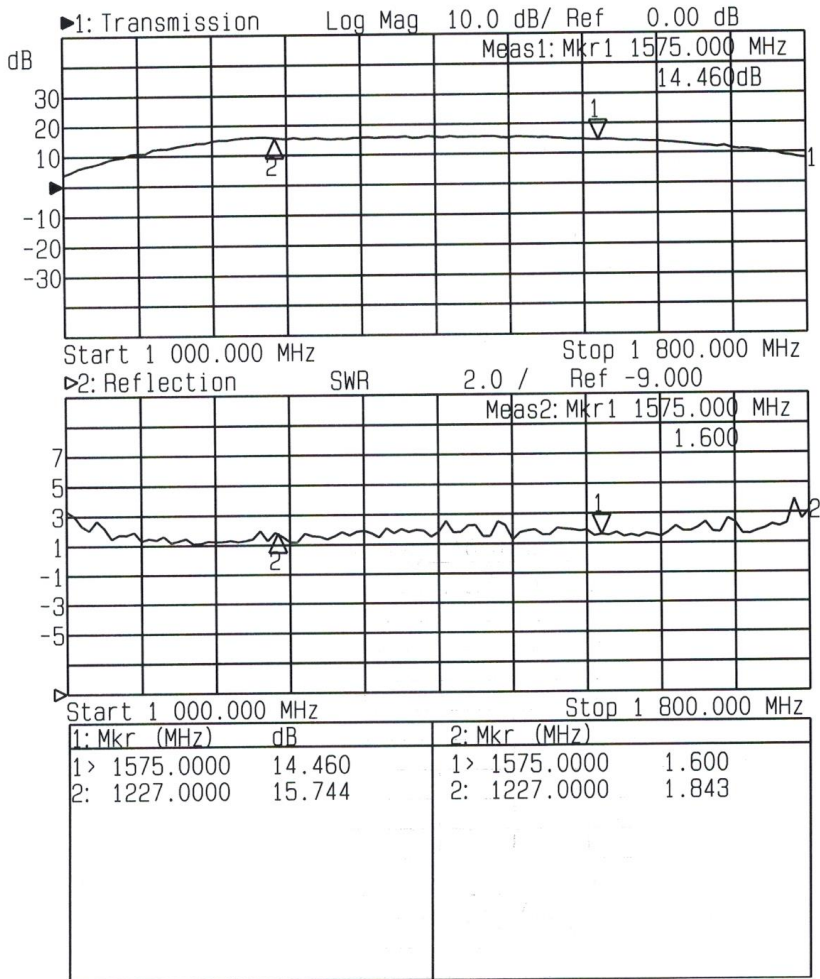

ALDCBS1X8 (Output Isolation)

Adjacent Output Isolation (J1-J3,J2-J4, etc) (Typical, type N conn.):

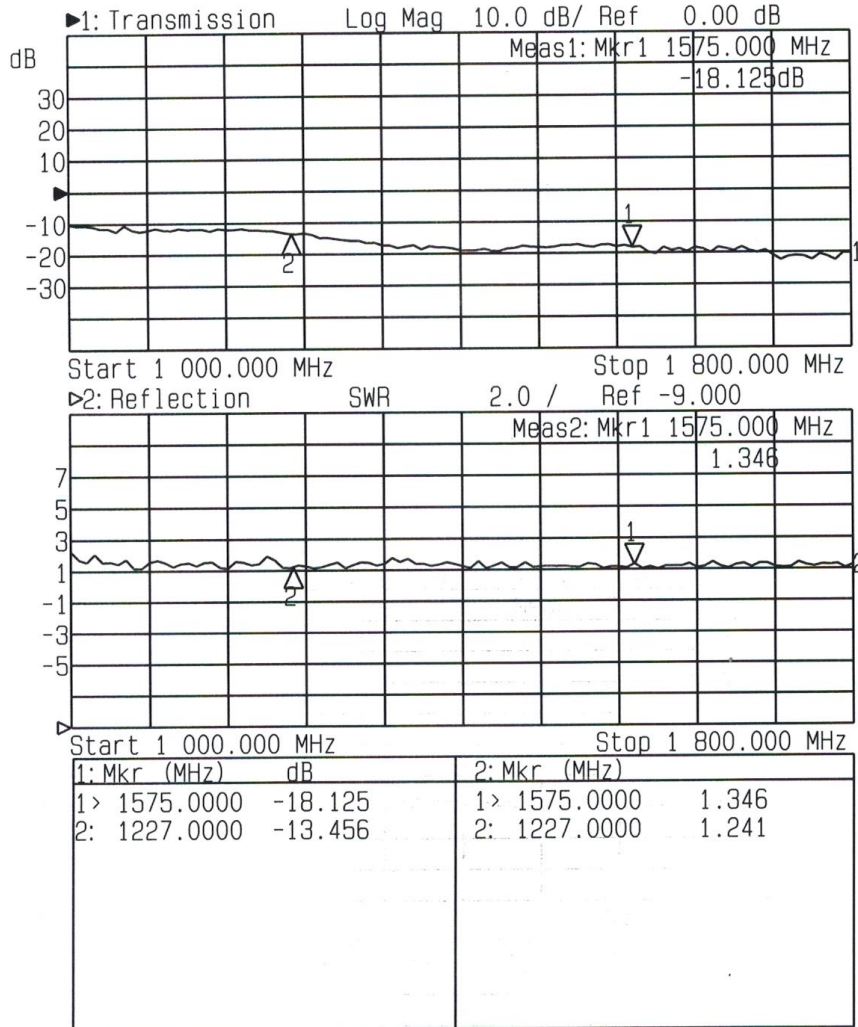



Mechanical

Dimensions: Height: 1.3"
Length (not including connectors) Body: 4.5"
Base Plate: 5.25"
Width (not including connectors): 2.5"

Weight: 10 oz. (286 grams)

Operating Temp. Range: -40° to + 75°C

Finish Housing and Base Plate: ELECTROLESS NICKEL PLATED
MIL-C-26074C CLASS 1, .0001-.0003 MAX
Finish Lid: ANODIZE, TYPE II, CLASS 2, BLACK, per MIL-A-8625

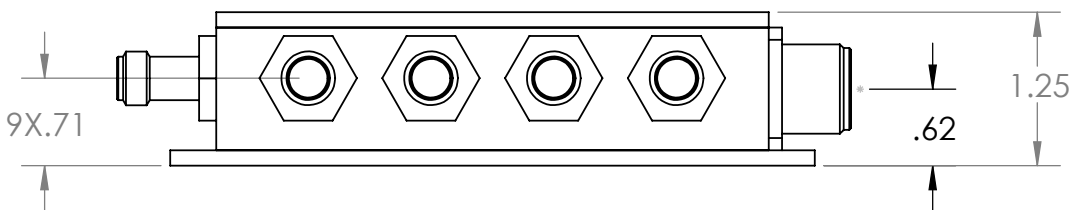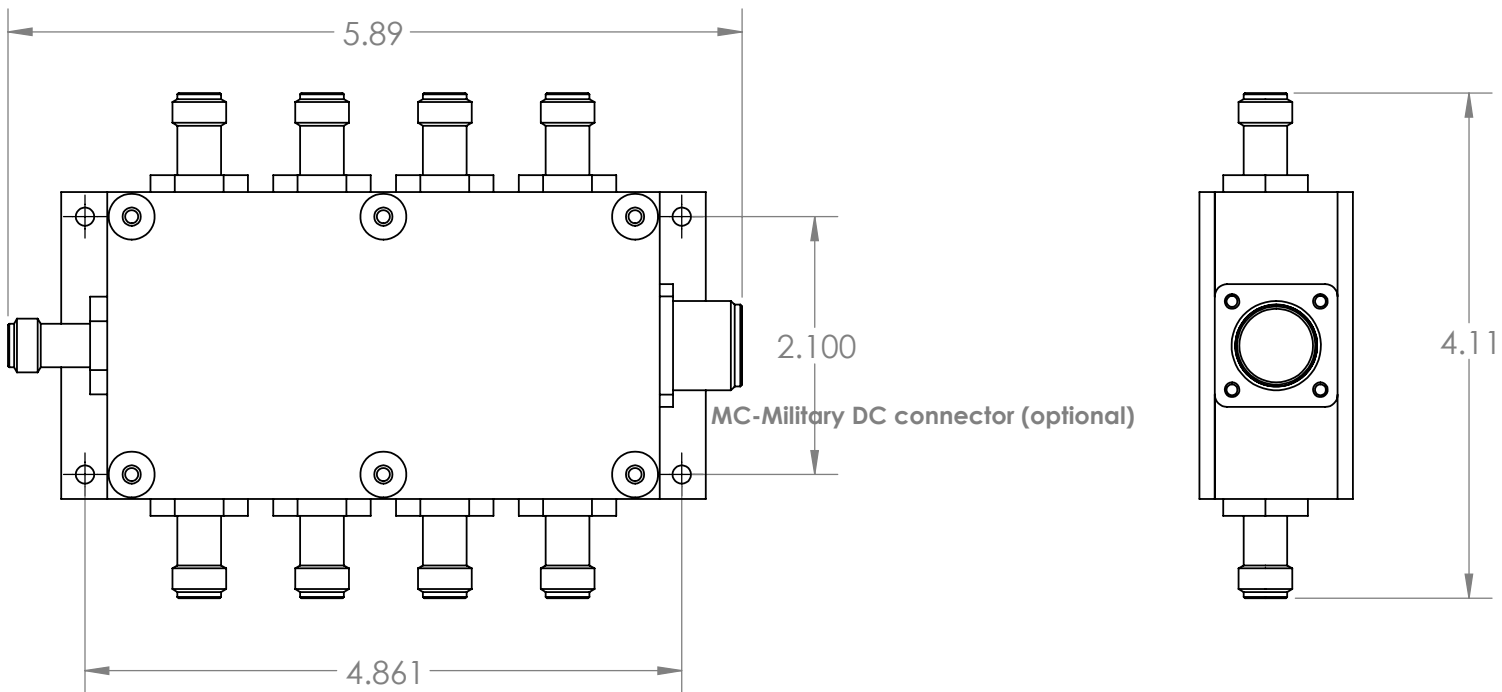

REV. A

08/08/15

6