


# PCM-3794/3594

## PCI-104 2-slot PCMCIA Module / Three IEEE-1394 Port Daughter Board

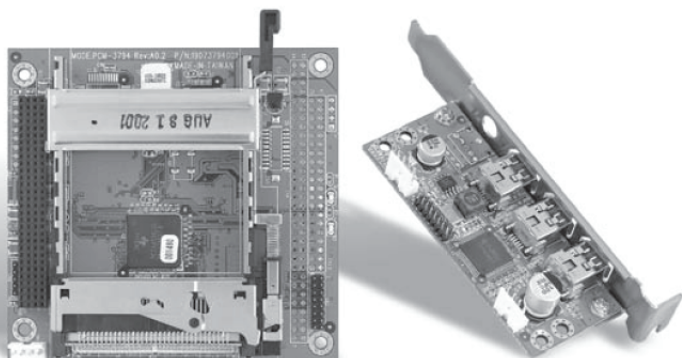

### Features

- PCMCIA Socket Supports Two Type II Cards or One Type III Card  
Supports R2 and Cardbus
- Supports Two PC Cards or CardBus Slots
- Supports Three IEEE-1394 Ports (with PCM-3594)

### Specifications


Standard	1997 PC Standard compliant PCI Local bus Specification Revision 2.1/2.2 compliant ACPI 1.0 compliant PC98/99 compliant
Other	Supports distributed DMA and PC/PCI DMA
Compatibility	Mix-and-match 5V/3.3V PC Card/16 cards and 3.3V CardBus cards
<b>PCM-3594 Daughter Board</b>	
Standard	OHCI link function designed to IEEE-1394 Open Host Controller Interface (OHCI) Specification OHCI link function is IEEE-1394-1995 compliant and compatible with proposal 1394a Supports serial bus data rates of 100, 200, and 400 Mb/sec
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)

### Ordering Information

- PCM-3794-A10**  
PCI-104 two-slot PCMCIA Module
- PCM-3794-A10-01**  
PCI-104 two-slot PCMCIA Module with PCM-3594

# PCM-3115B

## PC/104 2-slot PCMCIA Module

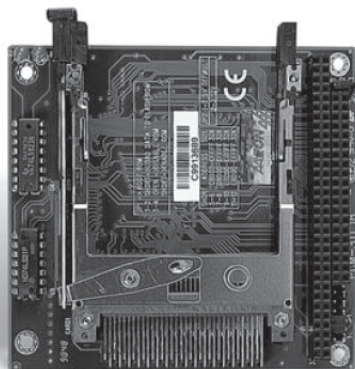

### Features

- PCMCIA Socket Supports Two Type I/II Cards or One Type III Card  
Supports Bootable Function From Linear Flash Card, ATA Card, and  
SRAM Card

### Specifications

Standard	Complies with PCMCIA v.2.1 and JEIDA v4.2
Memory	Programmable 8KB boot FLASH ROM
Interface	16-bit data bus
Indicator	Busy status LED
Power Requirement	+5V

### Ordering Information

- PCM-3115B**  
PC/104 two-slot PCMCIA Module

Note: All specifications are subject to change without notice.