


## AMD Geode™ GX Series Processor

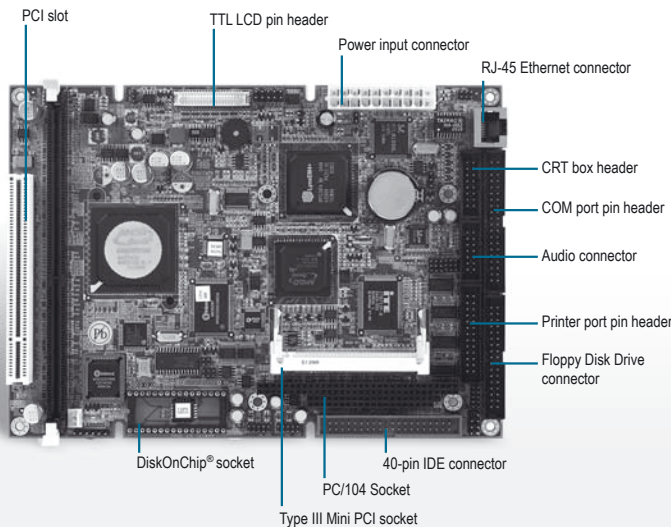

### Specifications

System	
Processor	Onboard AMD Geode™ GX 466/500(optional)/533 Processor
System Memory	184-pin DDR SDRAM DIMM x 1, Max. 512MB (DDR 266MHz)
Chipset	AMD Geode™ CS5535
I/O Chipset	ITE IT8712IX
Ethernet	Realtek RTL 8100BL, 10/100Base-TX RJ-45 connector x 1
BIOS	AWARD 256KB FLASH ROM
Watchdog Timer	Generates a time-out system reset
H/W Status Monitoring	Supports power supply voltages, fan speed and temperature monitoring
SSD	Type II CompactFlash™ slot x 1, DiskOnChip®
Expansion Interface	PCI slot x 1, PC/104 socket x 1, Type III Mini PCI socket x 1, PCI to ISA solution: ITE-8888
Battery	Lithium battery
Power Requirement	5V/ AT/ATX
Board Size	8"(L) x 5.75"(W) (203mm x 146mm)
Gross Weight	1.2 lb (0.5kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Display	
Chipset	AMD Geode™ GX
Memory	Shared system memory up to 16 MB
Resolutions	Up to 1280x1024@24bpp colors for CRT Up to 1280x1024@24bpp colors for LCD
I/O	
MIO	EIDE x 1(UDMA66x 1), Floppy Disk Driver x 1, Keyboard+Mouse x 1, RS-232 x 3, RS-232/422/485 x 1, Parallel x 1
IrDA	One IrDA Tx/Rx header
Audio	MIC-in, Line-in, Line-out, CD-in
USB	Two 5x2 pin headers support 4 USB1.1 ports
Digital I/O	Supports 8 in or 8 out

### Features

- Onboard AMD Geode™ GX 466/500(Optional)/533 Series Processor
- 18/24-bit TTL TFT LCD
- AC-97 2.1 High-quality Audio
- Supports Type II CompactFlash™ and DiskOnChip®
- Supports Type III Mini PCI, PC/104 and PCI Slots
- 4 COM/ 4 USB/ Digital I/O
- +5V Only Operation
- Supports DDR Memory



### Packing List

- 9657666600  
Jumper Cap
- Quick Installation Guide
- Utility CD
- PCM-5893L

### Ordering Information

- TF-PCM-5893L-A10**  
5.25" Board, GX533 400MHz, LCD, DDR, LAN, Audio, 4COM, USB, CF&DOC, PC/104, M-PCI, PCI, AT/ATX, Rev. A1.0
- TF-PCM-5893L-A10-01**  
5.25" Board, GX466 333MHz, LCD, DDR, LAN, Audio, 4COM, USB, CF&DOC, PC/104, M-PCI, PCI, AT/ATX, Rev. A1.0

### Optional Accessories

- PER-A011**  
Cable Kit for PCM-5893/PCM-5893L
- PCM-5600**  
PC/104 56K Fax/Modem Module
- PCM-3660B**  
PC/104 Ethernet Module
- PCM-3115B**  
PC/104 2-slot PCMCIA Module
- PER-C10L-A10**  
Mini PCI 10/100 Base-TX Ethernet Module with Realtek 8100C
- PER-C10L-A10-01**  
Mini PCI 10/100/1000 Base-TX Ethernet Module with Realtek 8110S
- PER-C10L-A10-02**  
Mini PCI 10/100 Base-TX Ethernet Module with Intel® 82551QM
- PER-C10L-A10-03**  
Mini PCI 10/100/1000 Base-TX Ethernet Module with Intel® 82541GI
- PER-C30F-A10**  
Mini PCI 3-port IEEE 1394a Module
- PER-V30C-A10**  
Mini PCI Single Channel Capture Module with Philips SAA7135
- PER-C40C-A10**  
Mini PCI 2-port RS-232 Module Rev. A1.0
- PER-C40C-A10-01**  
Mini PCI 4-port RS-232 Module Rev. A1.0

01

Compact Boards

02

SubCompact Boards

03

Embedded Motherboards

04

PC/104 CPU Modules

05

COM Express CPU Modules

06

ETX CPU Modules

07

RISC CPU Modules

08

Media PCs

09

Mini PCI Modules

10

PC/104 Peripheral Modules

11

Full-size SBC

12

Half-size SBC

13

Accessories