


RACK-2000/2004 RACK-200/210

Advanced 2U Chassis

2U Height Full Size Industrial PC Chassis

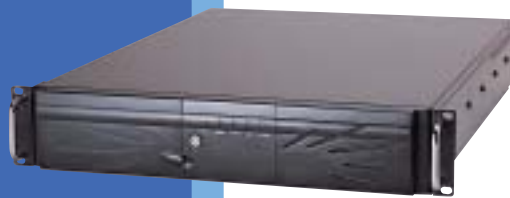

RACK-2000



RACK-200G



RACK-210G



RACK-200G
Top View



RACK-210G
Top View

SPECIFICATIONS

- EIA RS-310C 19" Standard Rackmount
- Front panel locking door system protects disk access and on/off power switches
- Plastic front panel
- Drive Bays:
1x3.5" FDD, 1x5.25" Drive, 2x3.5" HDD(internal)
- Cooling Fan: Two 8cm cooling fans with removable filter
- Optional Backplane : (RACK-2000)

Moduls	Slot (ISA/PCI/PICMG) (AGP/PCI/PIAGP)
PCI-5SDA	0 / 4 / 1
PCI-6SDA	3 / 2 / 1
PX-6SDA	0 / 5 / 1
PCIAGP-5SD	1 / 3 / 1

- RACK-2004 Supports PCI64-5SD 64-bit PCI backplane
- Power supply: PS/2 size AT/ATX SPS
ACE-93X/92X/91X, ACE-828 and ACE-83X series
ACE-R30A redundant power supply
- Standard equipped with ACE-832A power Supply
- Accessory: Rack-mount slide: 24" or 30" (Optional)
- Vibration: 5~17Hz, 0.1 double amplitude displacement
17~640Hz, 1.5G acceleration peak to peak
- Shock: 10G acceleration peak to peak (11ms)
- Color: Black (PANTONE BLACK C)
White (PANTONE 413C)
- Dimensions:
431(W) x 88(H) X 575(D)mm; (17" x 3.46" x 22.6)
- Net/GW (kg): 9/10

ORDERING INFORMATION

RACK-2000 [C]/ACE-832A

With ACE-832A 300W ATX power supply

RACK-2004 [C]/ACE-832A

With ACE-832A 300W ATX power supply, w/o PCI64-5SD backplane

RACK-2000 [C] R/ACE-R30A

With ACE-R30A 300W ATX Redundant power supply

RACK-2004 [C] R/ACE-R30A

With ACE-R30A 300W ATX Redundant power supply w/o PCI64-5SD

Option:

RACK-2000 [C]/ACE-[P] RACK-2000 [C]R/ACE-[P]

RACK-2004 [C]/ACE-[P] RACK-2004 [C]R/ACE-[P]

[C] Color Code: B= Black; W= White [P]= Power supply model

SPECIFICATIONS

- 2U height 19" Rack mounting chassis
- Plastic front panel
- Drive Bays :

Item	5.25" Drive	3.5" FDD	3.5" HDD
RACK-200		2	
RACK-210	1	1	2

- One 8cm cooling fan with filter
- AT type KBD connector on front panel
- Supports backplane: BP-5SD, PCI-5SD3, PCI-5SD5, PCI-5SD6, PCI-6SR, IP-5SD3, IP-5SD5
- Supports power supply: PS/2 size AT/ATX power supply (ACE-93x/92x/916 series and ACE-828 series)
- Vibration: 5~17Hz, 0.1" double amplitude displacement
17~640Hz, 1.5G acceleration peak to peak
- Shock: 10G acceleration peak to peak (11ms)
- Colors: Industrial Green (PANTONE 417C) or White (PANTONE 413C)
- Dimensions:
– RACK-200: 431(W)x88(H)x454(D)mm; (17"x3.5"x17.9")
– RACK-210: 431(W)x88(H)x477(D)mm; (17"x3.5"x18.8")
- Net/GW (kg): 9/10(RACK-200), 8/11(RACK-210)

ORDERING INFORMATION

RACK-200 [C] /ACE-920A:

2U rackmount chassis with ACE-920A power supply

RACK-210 [C] /ACE-920A:

2U rackmount chassis with ACE-920A power supply