


NOVA-LUKE

5.25" SBC with VIA® LUKE 1GHz/533MHz CPU, CRT, Dual GbE, SATA, USB 2.0, CFII and Audio



Solder Side

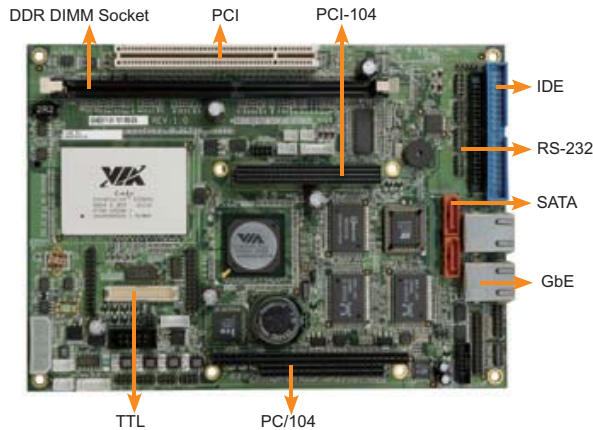

ILUKE-LVDS



Dual 18/24-bit LVDS Module

Feature

- VIA® LUKE CPU supports up to FSB 1GHz/533MHz
- DDR 400/333MHz DIMM socket supports up to 1GB
- Dual Realtek RTL8110S GbE
- SATA with RAID function support, CFII, IDE, USB 2.0 and Audio



Specification

- ◆ **CPU**
VIA® LUKE 1GHz/533MHz processor
- ◆ **System chipset**
VT8237R+
- ◆ **BIOS**
AMI BIOS
- ◆ **System Memory**
1 x 184-pin DDR 400/333MHz up to 1GB
- ◆ **Ethernet**
Dual RTL8110S for GbE
- ◆ **I/O**
2 x SATA-150 with RAID 0,1 and JBOD function support
2 x IDE
1 x LPT
1 x CFII
1 x PS/2 for KB/MS
5 x RS-232
1 x RS-232/422/485
8 x USB 2.0
- ◆ **Expansion**
1 x PC/104+ (PCI and ISA Bus)
1 x PCI
- ◆ **Audio**
Realtek ALC655 with AC'97 codec
- ◆ **Digital I/O**
8 bit digital I/O, 4 input / 4 output by super I/O

- ◆ **IrDA**
1 x IrDA by super I/O
- ◆ **Super I/O**
W83697HG
- ◆ **Display**
CRT integrated in VIA® LUKE
36-bit TTL integrated in VIA® LUKE
LVDS
Dual channel 18/24-bit LVDS by ILUKE-LVDS (Optional)
- ◆ **Watchdog Timer**
Software programmable supports 1-255 sec. by super I/O
- ◆ **Power Supply**
+5V, +12V AT/ATX support
- ◆ **Power Consumption**
5V@4.74A, +12V@0.02A, 5VSB@0.07A
(VIA® LUKE 1GHz, DDR 400MHz, 1GB SDRAM) -- 3D MARK
5V@3.89A, +12V@0.02A, 5VSB@0.07A
(VIA® LUKE 533MHz, DDR 400MHz, 1GB SDRAM) -- 3D MARK
- ◆ **Temperature**
Operation: 0 ~ 60° C (32 ~ 140° F)
- ◆ **Humidity**
Operation: 5% ~ 95%, non-condensing
- ◆ **Dimension**
203 mm x 146 mm
- ◆ **Weight**
GW: 1100 g; NW: 500 g

DDR400



Packing List

1 x NOVA-LUKE Single Board Computer	1 x VGA Cable (P/N: 32000-033800-RS)
1 x ATA66/100 Flat Cable (P/N: 32200-000052-RS)	1 x USB Cable (P/N: 32000-070300-RS)
2 x SATA Cable (P/N: 32000-062800-RS)	1 x Audio Cable (P/N: 32000-072100-RS)
1 x SATA Power Cable (P/N: 32100-088600-RS)	1 x Mini Jumper Pack
3 x Single RS232 Cable (P/N: 32200-000049-RS)	1 x Utility CD
1 x RS232/422/485 Cable (P/N: 32200-026500-RS)	1 x QIG (Quick Installation Guide)
1 x KB/MS Cable (P/N: 32000-023800-RS)	

Ordering Information

Part No.	Description
NOVA-LUKE-1G-R10	5.25" VIA® LUKE 1GHz Processor, CRT/LCD, Dual GbE, SATA and Audio
NOVA-LUKE-533-R10	5.25" VIA® LUKE 533MHz Processor, CRT/LCD, Dual GbE, SATA and Audio
ILUKE-LVDS-R10	LVDS Function Daughter Board
32100-052100-RS	ATX Power Cable
32200-015100-RS	LPT Cable