


ROCKY-3742

PICMG Dual Socket 370 133MHz FSB CPU Card with VGA, LAN, 1394 & Audio

ROCKY-3722

PICMG Dual Socket 370 100MHz FSB CPU Card with VGA, Dual LAN, SCSI & Audio

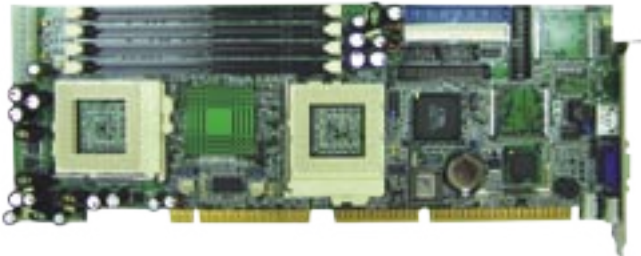

Feature

- Dual Intel PIII / Celeron CPU supports upto FSB 133 MHz
- SiS 6326 graphic chip with 4MB memory
- PC133 SDRAM memory support
- LAN, IEEE-1394(option), Audio integrated

Specifications

CPU	Dual Socket-370 Processor support Celeron™ (PPGA)/Pentium® III (FC-PGA) up to 133MHz FSB
System Chipset	VIA VT82C694X/VT82C686B
System Memory	4 x 168-pin DIMM sockets up to 2GB SDRAM
Display	SiS 6326 with 4MB V-RAM
Ethernet	1 x Intel 82559 10/100Mbps LAN Chip
SSD	Compact Flash™ Type II Socket to support Compact Flash and IBM MicroDrive HDD.
Audio	AC'97 compliant Audio CODEC
I/O	<ul style="list-style-type: none"> - 2 x RS-232 serial port (16C550 UARTs compatible) - 1 x parallel port (SPP/EPP/ECP) - 2 x USB 1.1 (Pin header) - 1 x IrDA (SIR) - 1 x FDD port, support 1.44MB, 2.88MB, 3-mode function - 2 x ATA-100 channels
1394	TI TSB43AA22 chipset up to 100/200/400 Mbps Fully supports provisions of IEEE 1394-1995 standard for high performance serial bus
WDT	software programmable, support 1~ 255 sec. system reset
Power Control	Support ATX power control function
Power Consumption	+5V@15A, +12V@350mA (Dual PIII 1GHz and 2GB SDRAM)
Operating Temp.	0~60°C (CPU cooler required)
Relative Humidity	5~95%, non-condensing

Ordering Information

- **ROCKY-3742EVF**
PICMG Dual Socket 370 133MHz FSB CPU Card with VGA, LAN, 1394 & Audio
- **ROCKY-3742EV**
PICMG Dual Socket 370 133MHz FSB CPU Card with VGA, LAN & Audio

IEI Option

- **CB-USB02**
Dual ports USB cable with bracket

page 5-6

Feature

- Dual Intel PIII / Celeron CPU supports upto FSB 100 MHz
- SiS 6326 graphic chip with 4MB memory
- PC100 SDRAM memory support
- LAN, Ultra160 SCSI(option), USB, Audio integrated

Specifications

CPU	Dual Socket 370 base support Celeron® (P-PGA)/ Pentium® III (FC-PGA) CPU up to 100MHz FSB
BIOS	Award BIOS
System Chipset	Intel® 440BX
System Memory	4 x168-pin DIMM sockets up to 1GB SDRAM
Display	<ul style="list-style-type: none"> - Chip : SiS 6326 - V-RAM : 4MB - Resolution : 1600 x 1200 (256 colors) - Connector : DB-15 for CRT display
Ethernet	Two Intel 82559 10/100Mbps Ethernet chips with RJ-45 connectors, support AOL & WOL function
SSD	One DiskOnChip™ socket
I/O	<ul style="list-style-type: none"> - 2 x RS-232 serial port (16C550 UARTs compatible) - 1 x parallel port (SPP/EPP/ECP) - 2 x USB 1.1 (Pin header) - 1 x IrDA (SIR) - 1 x FDD port, support 1.44MB, 2.88MB, 3-mode function - 2 x ATA-33 IDE channels
SCSI Controller	<ul style="list-style-type: none"> - Chip : SYMBIOS 53C1010 - Interface : 2 x Ultra160 SCSI (160MB/Sec.; 68-pin connector) - Drivers : Microsoft Windows NT, Windows 2000, Windows 95/98, Novell NetWare, SCO Openserver, SCO UnixWare, IBM OS/2, Linux and Sun Solaris
WDT	software programmable, support 1~ 255 sec. system reset
Hardware monitor	Function chip on board
ISA Plus™	Designed to enhance the ISA bus drive capability
Power Control	Supports ATX power control function
Power Consumption	+5V@8.5A, +12V@350mA, -12V@50mA (Dual Pentium III and 512MB SDRAM)
Operating Temperature	0~60°C(CPU cooler required)
Relative Humidity	5~95%, non-condensing
GW	900g
Note	ROCKY-3722EVs shipping with one U160-CB01 cable

Ordering Information

- **ROCKY-3722EVs-R2**
PICMG Dual Socket 370 100MHz FSB CPU Card with VGA, Dual LAN, SCSI & Audio R2
- **ROCKY-3722EV-R2**
PICMG Dual Socket 370 100MHz FSB CPU Card with VGA, Dual LAN & Audio, R2
- **ROCKY-3722V-R2**
PICMG Dual Socket 370 100MHz FSB CPU Card with VGA & Audio, R2

IEI Option

- **U320-CB01** Internal Ultra320 SCSI cable
- **CB-U320EXT** External Ultra320 SCSI connector
- **CB-USB02** Dual ports USB cable with bracket

page 5-6