


ROCKY-4786

PIAGP Socket-478 800MHz FSB CPU Card

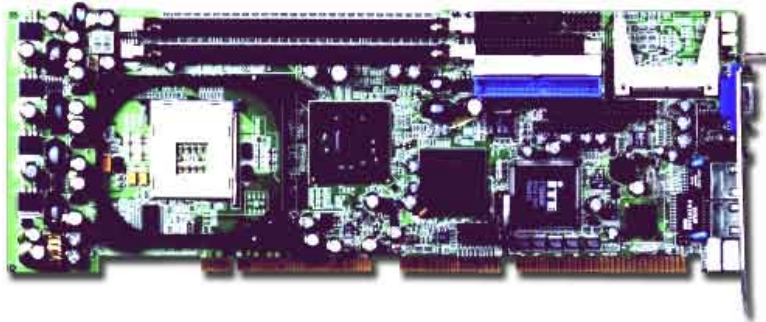

features

- Intel P4 / Prescott / Celeron CPU supports up to
- Intel Extreme Graphic II integrated graphic engine
- Dual channel DDR400 SDRAM memory support
- LAN, SATA, USB 2.0, Audio integrated
- Optional RAID function available

specifications

CPU Socket

- Socket-478

CPU Type

- Intel Pentium 4/ Prescott/ Celeron

FSB

- 533/800 MHz

Chipset

- Integrated with Intel 865G/GV, Bus:AGP 4X/8X

Ethernet

- 1st 10/100Mbps i82562ET Fast Ethernet controller (ROCKY-4786EV)
- 2nd 82547 GbE controller (ROCKY-4786EVG/EVGR/EVGL)

I/O Interface

- 2 x RS-232 serial ports
- 1 x PS/2 for Keyboard/Mouse
- 1 x LPT (SPP/EPP/ECP)
- 8 x USB 2.0 ports
- 1 x IrDA

Driver Interface

- 2 x IDE ATA-100/66/33
- 2 x SATA-150 , RAID Function (EVGR)
- 1 x FDD

Audio

- AC'97 Codec

SSD

- CF Type II

Power Consumption

- +12V@7.52A, +5V@6.98A, -12V@0.5A (P4 3.0GHz, Dual channel DDR400 512MB SDRAM)

Watchdog Timer

- Software programmable supports 1 ~ 255 seconds system reset

Hardware Monitor

- CPU Vcore, Vcc, CPU/System fan speed and temperature detecting function

Operation Environment

- Temperature Range 0 ~ 60°C
- Relative Humidity 5 ~ 95%, non-condensing

GW

- 1.1kg

Ordering Information



this product is
manufactured by:



Part Number

ROCKY-4786EV-R30

ROCKY-4786EVG-R30

ROCKY-4786EVGR-R30

Option

CB-USB-02

CF-514

Description

PICMG Socket-478 800MHz FSB Based CPU card with VGA, LAN, S-ATA, USB 2.0 & Audio

PICMG Socket-478 800MHz FSB Based CPU card with VGA, LAN, GbE, S-ATA, USB 2.0 & Audio

PICMG Socket-478 800MHz FSB Based CPU card with VGA, LAN, GbE, S-ATA, USB 2.0, RAID & Audio

Dual port USB cable

High performance Skiving Pentium@4 CPU cooler

Tel: 604.945.9565 ~ Fax: 604.945.9566 ~ www.tri-m.com
1407 Kebet Way, Unit 100 ~ Port Coquitlam ~ BC ~ V3C 6L3~ Canada

