
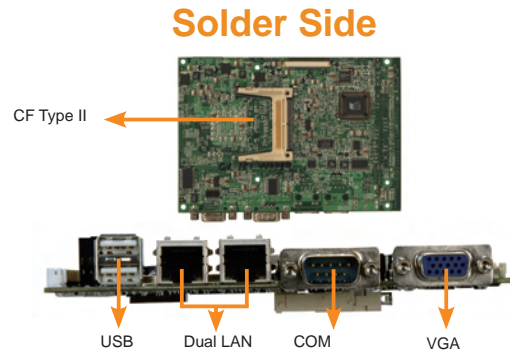


WAFER-GX

3.5" SBC with AMD® GX466 333MHz CPU, Dual LAN, SATA, VGA/LVDS/TTL and Audio

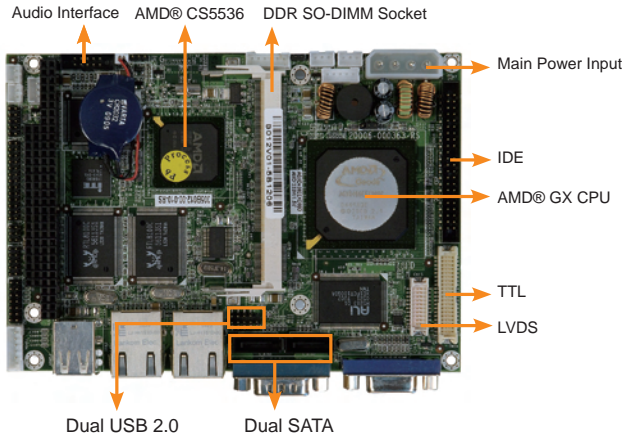


Specifications

- ◆ **CPU**
AMD® GX466 with 333MHz processor
- ◆ **System Chipset**
AMD® GX466 + CS5536
- ◆ **BIOS**
Award BIOS
- ◆ **System Memory**
1 x 200-pin SO-DIMM DDR 266MHz up to 512MB
- ◆ **Ethernet**
10/100Mbps dual RTL8100C Ethernet chipsets
- ◆ **I/O Interface**
4 x USB 2.0
2 x SATA with ALI M5283 RAID 0,1 function support
1 x LPT
1 x CF Type II
2 x RS-232
1 x RS-422/485
1 x PS/2 for KB/MS
1 x IDE
- ◆ **Expansions**
1 x PC/104
- ◆ **Digital I/O**
8-bit digital I/O, 4-bit input/ 4-bit output
- ◆ **Super I/O**
W83627EHG
- ◆ **Audio**
Realtek ALC203 with AC'97 Codec
- ◆ **Display Interface**
VGA integrated in AMD® GX466
24-bit TTL
18-bit single channel LVDS
- ◆ **Watchdog Timer**
Software programmable supports 1-255 sec. system reset
- ◆ **Power Supply**
5V only, AT/ATX support
- ◆ **Power Consumption**
5V@1.15A
(AMD® GX466, DDR 266MHz/ 256MB HCT11.2)
- ◆ **Temperature**
Operation: 0° to 60°C (32°F~ 140°F)
- ◆ **Humidity**
Operation: 5% to 95% non-condensing
- ◆ **Dimensions**
146mm x 102mm
- ◆ **Weight**
GW: 670g / NW: 230g

Features

1. AMD® GX466 333MHz and RoHS compliant
2. DDR 266MHz SO-DIMM socket support up to 512MB
3. Dual 10/100Mbps RTL8100C Ethernet chipsets
4. SATA, USB 2.0, CF Type II, LPT and COM port

Dimensions

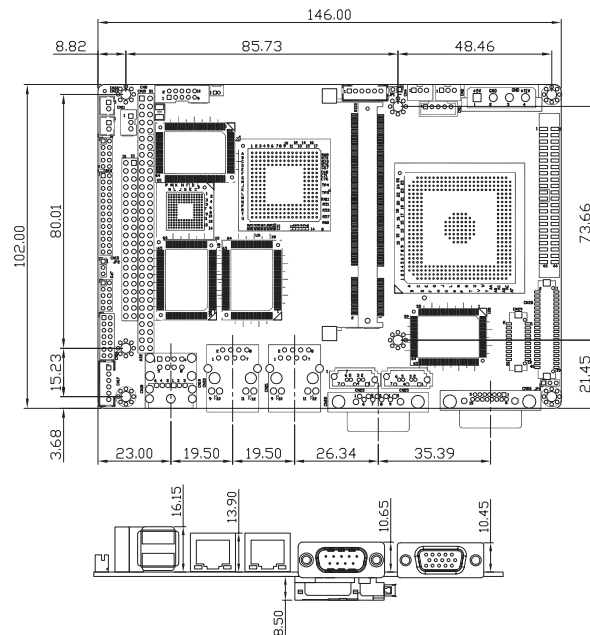

Packing List

1 x WAFER-GX Single Board Computer
1 x ATA33 Flat Cable (P/N: 32200-000009-RS)
2 x SATA Cable (P/N: 32000-062800-RS) (WAFER-GX-466S only)
1 x SATA Power Cable (P/N: 32100-088600-RS) (WAFER-GX-466S only)
1 x RS-232 Cable (P/N: 32200-000049-RS)
1 x RS-232/422/485 Cable (P/N: 32200-026500-RS)
1 x KB/MS Y Cable (P/N: 32000-023800-RS)
1 x Mini Jumper Pack (P/N: 33100-000033-RS)
1 x Audio Cable (P/N: 32000-072100-RS)
1 x QIG/CD (Quick Installation Guide)

Ordering Information

Part No.	Description
WAFER-GX-466-R10	3.5" SBC with AMD® GX466 333MHz CPU, VGA/LVDS/TTL, Dual LAN, USB2.0 and Audio
WAFER-GX-466S-R10	3.5" SBC with AMD® GX466 333MHz CPU, VGA/LVDS/TTL, Dual LAN, SATA, USB2.0 and Audio
WAFER-GX-CE050	WindowsCE5.0 Image & BSP S/W CD, Licensed Sticker (W/O CPU Board)
WAFER-GX-XPE	WindowsXP Embedded Image & SLD S/W CD, Licensed Sticker (W/O CPU Board)
32000-070300-RS	USB Cable
32200-015100-RS	LPT Cable