

FiD 2.5" SATA series Installation Guide

1. Pre-inspection

1.1 Package

The FiD is packed with the following accessory and components:

- 1pcs of FiD 2.5" SATA flash disk
- 1pcs of installation guide

If any listed item lost, please contact the dealer.


1.2 Unpacking the IFD

Avoid any damage during the unpacking process, please ensure the FiD against the environment might cause malfunction, such as electrostatic, electromagnetic wave, water or flame.

- Scrutinize the outward appearance of the FiD, if there is any severe damage (serious dent, components come off, water-stained), please contact the dealer.
- Record the product serial number and shipment date.
- Keep the whole packing material, components and related documents (receipt or invoice) for warranty service.

2. Installation

- Shut down the power of the PC and remove the enclosure.
- Mount the FiD in a drive bay with the screws.
- Connect the cable (7 pin connector) to the SATA socket of your system main board.
- Connect the cable to FiD, and make sure to correctly position the pin 1 of the cable to the pin 1 of the FiD.
- Connect power cable(15 pin connector) to FiD.

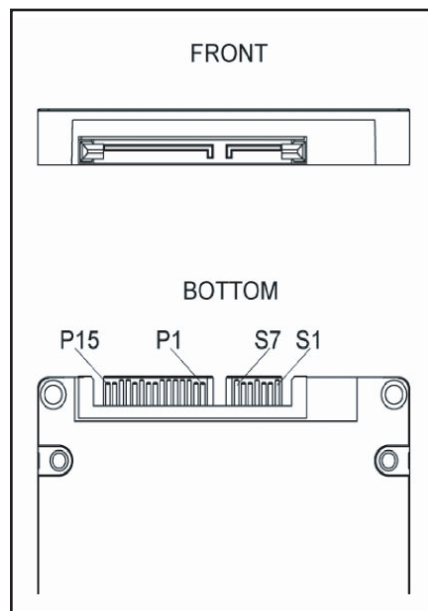

- Assemble the enclosure and power on the PC.
- Enter the BIOS setting menu and set up the BIOS to recognize the FiD.

InnoDisk Corporation

10F, No. 465, Sec. 6, Zhongxiao E. Rd., Nangang District, Taipei 115, Taiwan, R.O.C.

TEL: +886-2-2653-5565

FAX: +886-2-2653-5965

<http://www.innodisk.com>

E-Mail: sales@innodisk.com