


VSX104+

300MHz Vortex86SX PC/104plus Module with Dual LAN

FEATURES

- Onboard 300MHz Vortex86SX SoC
- 4 serial, 2 USB 2.0
- Dual 10/100 LAN
- Type I CompactFlash™ and microSD
- Onboard, soldered DDR2 RAM
- Extended temperature operation
- Fanless

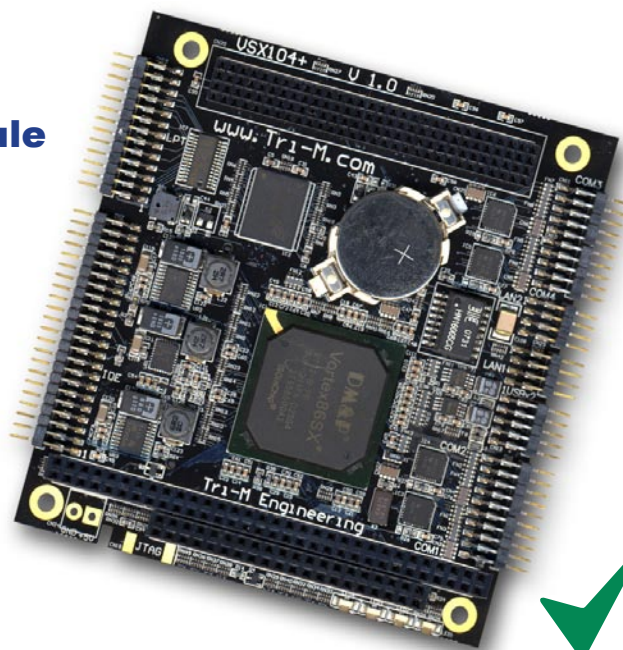

SYSTEM

CPU	DM&P SoC CPU Vortex86SX-300MHz
BIOS	AMI BIOS
Cache	16K I-Cache, 16K D-Cache
System Chipset	Vortex86SX
I/O Chipset	Vortex86SX
Ethernet Chipset	Vortex86SX Intel 82551IT
Ethernet Interface	2x Integrated 10/100Base-T
Expansion	PC/104plus standard compliant
Speaker Out	Onboard speaker
Real Time Clock	RTC with lithium battery backup
Watchdog Timer	Yes

INTERFACE

Serial Port	4x 16550-compatible serial ports, RS-232
LAN Port	2x integrated 10/100 Ethernet
EIDE	2x EIDE (Ultra DMA 100)
Parallel Port	1x bi-directional AT-compatible printer port
USB Port	2x USB 2.0
K/B & Mouse	PS/2
GPIO	1x 8-bit GPIO port
Redundancy	1x Redundancy port
SPI	1x External SPI port

ORDERING INFORMATION

Part Number	
VSX104+PBF	Vortex86SX 300MHz PC/104plus Module, 4 serial, 1 parallel, 2 USB, E-IDE, 128MB DDR2, 2 LAN
Accessories	
VSX104 KIT	VSX104 Starter Kit
CBLSET1-VSX104	Cable kit for VSX104 (2x dual serial, 1x parallel, 1x dual USB, 1x EIDE, 1x LAN, 1x utility)
CF-4GB	4GB, Type I CompactFlash™
CF-8GB	8GB, Type I CompactFlash™

MEMORY & STORAGE

Memory	Onboard 128MB DDR2 RAM
Storage	2MB onboard SPI flash (floppy emulation) Type I CompactFlash™ socket microSD socket

SOFTWARE SUPPORT

Operating System (O/S)	AMI PC BIOS - 100% x86 compatible, DOS, MS-DOS, DRDOS, LINUX, Windows™CE
------------------------	--

ELECTRICAL SPECIFICATIONS

Power Input	Single 5V DC operation
Power Consumption	2.5 watt, (+5V@500mA)

ENVIRONMENT & MECHANICAL

Operating Temperature	-40° to 85°C
Storage Temperature	-50° to 125°C
Relative Humidity	5 to 90% @ 40°C, relative humidity, non-condensing
Dimension (LxWxH)	3.55" x 3.775" x 0.9"
Weight	52g (incl. battery)

WARRANTY

1 year limited warranty
