


ETX-625

Intel® Low Power Pentium® III and Ultra Low Voltage Celeron® Processors

18/36 bit LCD connector
(TTL Signal)

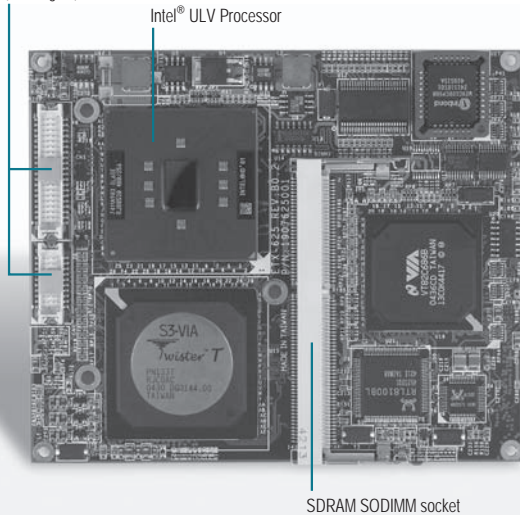

Specifications

| System | |
|-----------------------|--|
| CPU | LP Pentium® III / ULV Celeron® Processor |
| System Memory | SDRAM PC-133 SODIMM, Max. 512MB |
| Chipset | VIA VT8606+VT82C686B |
| Ethernet | Realtek RTL8100, 10/100 Base-TX RJ-45 |
| BIOS | AWARD 256KB FLASH ROM |
| Watchdog Timer | Generate a time-out system reset |
| H/W Status Monitoring | Supports power supply voltages, fan speed and temperature monitoring |
| Expansion Interface | PCI, ISA |
| Power Requirement | +3.3V, +5V. AT/ATX |
| Board Size | 4.5"(L) x 3.74"(W) (114mm x 95mm) |
| Gross Weight | 0.66lb (0.3Kg) |
| Operating Temperature | 32°F ~ 140°F (0°C ~ 60°C) |
| Display | |
| Chipset | VIA VT8606 |
| Memory | Shared memory up to 32MB |
| Resolutions | Up to 1600 x 1200 |
| LCD Interface | TTL and LVDS |
| TV-out | Composite / S-Video |
| I/O | |
| Audio | 2CH AC97 CODEC |
| USB | USB 1.1 |

Features

- Onboard Intel® LP Pentium® III / ULV Celeron® Processor
- Supports CRT and LCD / TV Display
- Supports 10/100Mbps Ethernet
- Supports AC97 Audio CODEC



Packing List

- Quick Installation Guide
- Utility CD
- ETX-625

Ordering Information

- **ETX-625-A10**
ETX Board, ULV ICP 400, LCD-TV, SDR, LAN, Audio, Rev.A1.0
- **ETX-625-A10-01**
ETX Board, ULV ICP 650, LCD-TV, SDR, LAN, Audio, Rev.A1.0
- **ETX-625-A10-02**
ETX Board, LP P3-933, LCD-TV, SDR, LAN, Audio, Rev.A1.0

Optional Accessories

- **ETX-901A-A10**
ETX Carrier Board, PCI, ISA, ATX, Rev.A1.0

1
Compact Boards

2
SubCompact Boards

3
Embedded Motherboards

4
Media PC

5
PC/104 CPU Modules

6
ETX CPU Modules

7
RISC CPU Module

8
Mini PCI Modules

9
PC/104 Peripheral Modules

10
Full-size SBC

11
Half-size SBC

12
Accessories